

H-1200

TWO STAGE DRINKING WATER SYSTEM



FEATURES • BENEFITS

- ◆ High-performance system certified to reduce up to 99.6% of Total PFAS**
- ◆ Exclusive Micro-Pure™ filtering material coats the pleated surface inside the cartridge
- ◆ The Pentair Everpure signature metal canister delivers commercial-grade durability
- ◆ Effectively reduces Methyl tert-butyl ether (MTBE) and lead
- ◆ Retains vital minerals found naturally in water to ensure the delicious taste of your water
- ◆ Dual-cartridge system boasts a longer lifespan compared to single-cartridge system, up to 1,000 gallons or one year

INSTALLATION TIPS

- ◆ Install vertically with cartridge hanging down.
- ◆ Use the minimum length of tubing possible.
- ◆ Space required: 15" W x 22" H x 5" D (38 W x 56 H x 13 D cm) including 2-1/2 inches of clear space under unit for cartridge change.


OPERATION TIPS

- ◆ Replace both cartridges at the same time; either when capacity is reached, or when flow becomes too slow. To ensure optimum water filtration, cartridges should be changed annually.
- ◆ Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts.

INCLUDES

- ◆ Side faucet
- ◆ Installation and operation manual

EVERPURE H-1200 TWO-STAGE DRINKING WATER SYSTEM

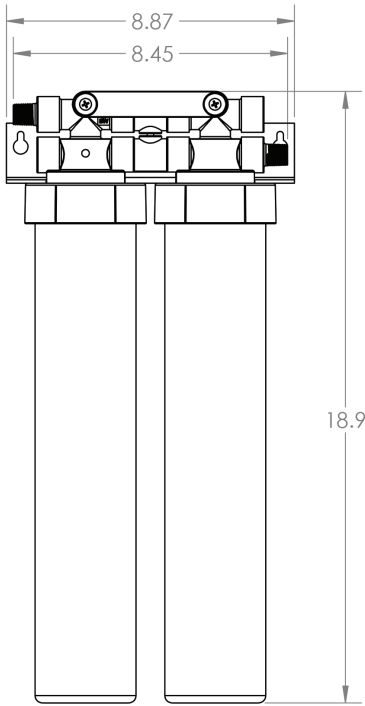

SPECIFICATIONS

- ◆ **System (Model/Part No.)**
H-1200/EV928200
- ◆ **Flow Rate**
controlled at 0.5 gpm (1.9 Lpm)
- ◆ **Inlet Size**
3/8" QC
- ◆ **System Dimensions**
15" W x 22" H x 5" D
(38W x 56H x 13D cm)
- ◆ **System Weight**
4.50 lbs
(2.04 kg)
- ◆ **Contaminant Reduction**
Chlorine Taste & Odor, Lead, Microplastics, MTBE, Chloramine, Volatile Organic Chemicals (VOC), Dirt and Cloudiness **, Total PFAS, Cysts: NSF/ANSI Standard 53 certified to reduce cysts such as *Cryptosporidium* and *Giardia* by mechanical means.
- ◆ **Micron Rating**
0.5
- ◆ **Approximate Filter Life***
Up to 1 Year
- ◆ **Capacity**
1,000 Gallons (3,785 Liters)
- ◆ **Certifications**
NSF/ANSI Standard 42, 53, 401
- ◆ **Pressure**
10-125 psi (0.7-8.6 bar)
non-shock
- ◆ **Temperature**
35-100° F (2-38° C)
cold water use only
- ◆ **Replacement Cartridges**
(Model/Part No.)
H-1200/EV928201 (Twin Pack)

*Filter life dependent on gallon usage and overall incoming water quality.

** Not tested or certified by NSF

**MADE IN THE
USA**
OF FOREIGN & DOMESTIC PARTS

EPA Est. No. 082989-CHN-001



The model H-1200 is Tested and Certified by NSF International against NSF/ANSI Standards 42, 53, and 401 for the reduction of the claims specified on the Performance Data Sheet.



The H-1200 is certified by IAPMO R&T against NSF/ANSI 53 for the reduction of Total PFAS**

**The test mixture for Total PFAS is made up of PFOA (500 ppt), PFOS (1,000 ppt), PFHxS (300 ppt), PFNA (50 ppt), PFHpA (40 ppt), PFBS (260 ppt), and PFDA (10 ppt). This system meets the 20 ppt requirement for Total PFAS.



Pentair Residential Filtration, LLC

13845 Bishops Dr. | Suite 200 | Brookfield, WI 53005 | United States

P: 262.238.4400 | Customer Service: 800.279.9404 | tech-support@pentair.com | pentair.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.

©2024 Pentair. All Rights Reserved.

310908 0C24